



Replacement PTAC/PTHP Chassis Replaces: American Standard- RemoteAire Type 42



NOMINAL CAPACITY:

9,000, 12,000, 15,000, BTU/h

ColdPoint Corp, Rome, New York 13440 • Phone (315) 339-2331 • Fax (315) 339-2358 • Web: www.adirondackaire.com

Shown w/optional Supply Air Duct



Centrifugal Condenser Fan

Description:

Adirondack-Aire '42' Series is a direct replacement for American Standard- RemoteAire type 42 chassis. The chassis is a part of a complete system, which consists of the chassis, a wall sleeve, room cabinet, outdoor louver, and sometimes a separate heat section. The chassis contains the compressor, indoor and outdoor heat exchangers, fan motors & fans, and controls. The '42' is dimensionally identical to the original for a fast, easy, and trouble free installation. Proven technology, quality components, careful design and testing, and the latest in reliability and efficiency advances assure long life, user satisfaction, and lower energy cost! Consider the extensive list of standard features which includes: Rust-Block* corrosion protection system, centrifugal condenser fan, evaporator freeze protection, pull handle, permanent electrostatic air filter, and high-pressure over protection.... and Adirondack-Aire is the replacement solution the competition can't match. Cold Point Corp. backs the '42' with a customer friendly one-year parts and labor warranty and five-year compressor warranty, (see Warranty document for details). Heat Pumps are available and include a thermostatic expansion valve and condenser drain pan valve. Consult factory for availability of heat pumps.

Application & Benefits:

The Adirondack-Aire '42' series replacement chassis fits the existing American Standard wall sleeves and room cabinets without modification. A forward curved centrifugal condenser fan provides proven airflow performance. The standard high-pressure switch and evaporator freeze protection stops unit operation before damage occurs should airflow become reduced or obstructed due to dirty coils, obstructed airflow, or motor failures or lock-up....a premium feature usually found only in expensive commercial systems. Condensate re-evaporation and the Rust-Block system assure a stain-free building exterior. High efficiency compressors provide demonstrated reliability and low sound levels...and because the chassis dimensions and construction details are like the original replacement work is fast and easy. Using Adirondack-Aire replacements eliminates the need for room and exterior wall renovation and is the solution that gets your property back in service quickly and at the lowest total cost. Choose the optional room cabinet to give the unit a brand new look and improve room aesthetics.

Options/Accessories:

- Heat Pump (consult factory)
- Supply Air Collar
- Electric heat or Hydronic heat
- Control options
- Motorized fresh air
- Cabinets
- Wall Sleeves
- Louvers
- 115V & 265/277V (availability varies by model size)

* Rust-Block corrosion protection system consists of:
•Heavy gauge galvanized steel construction with powder paint finished condenser & evaporator pans

•Galvanized or Aluminum Condenser Fan
•Stainless steel compressor and condenser motor studs

•Magnaguard and/or stainless steel screws and fasteners

Standard Features

- 1). Made in USA
- 2). Designed for easy installation & compatibility. Dimensionally identical to original American Standard- Type 42 chassis.
- 3). Exclusive Rust-Block corrosion protection
- 4). High efficiency PSC type fan motors w/built-in temperature protection
- 5). UL listed components and construction
- 6). Quiet, durable, and efficient compressor with built-in pressure & temperature protection
- 7). Heavy Gauge G90 galvanized steel construction with powder coat painted condenser & evaporator pans
- 8). High efficiency copper tube-aluminum fin evaporator and condenser coils
- 9). Centrifugal condenser fan for proven airflow performance
- 10). Condensate re-evaporation
- 11). High Pressure switch with manual reset
- 12). Frost free low ambient cooling*
- 13). Electrostatic air filter
- 14). Heat pump heating to 35°F outdoor**
- 15). Capillary expansion. Thermostatic expansion valve (heat pumps)
- 16). Positive shift reversing valve (heat pumps)
- 17). Precision charged with R-22 refrigerant
- 18). Line Cord (ex. 265V)

*Cooling operation locks-out at 34° F outdoor temperature and restarts @ 55° F.

**Actual temperature affected by relative humidity, solar effect, etc.




42 Dimensions and Specifications

Note: Due to Cold Point Corporation's ongoing quality & product development programs, design and specifications may change. Always consult factory to verify the information provided here.



DIMENSIONAL DETAIL '42'

IMPORTANT! Chassis must replace a unit of like capacity to assure proper **power supply**.

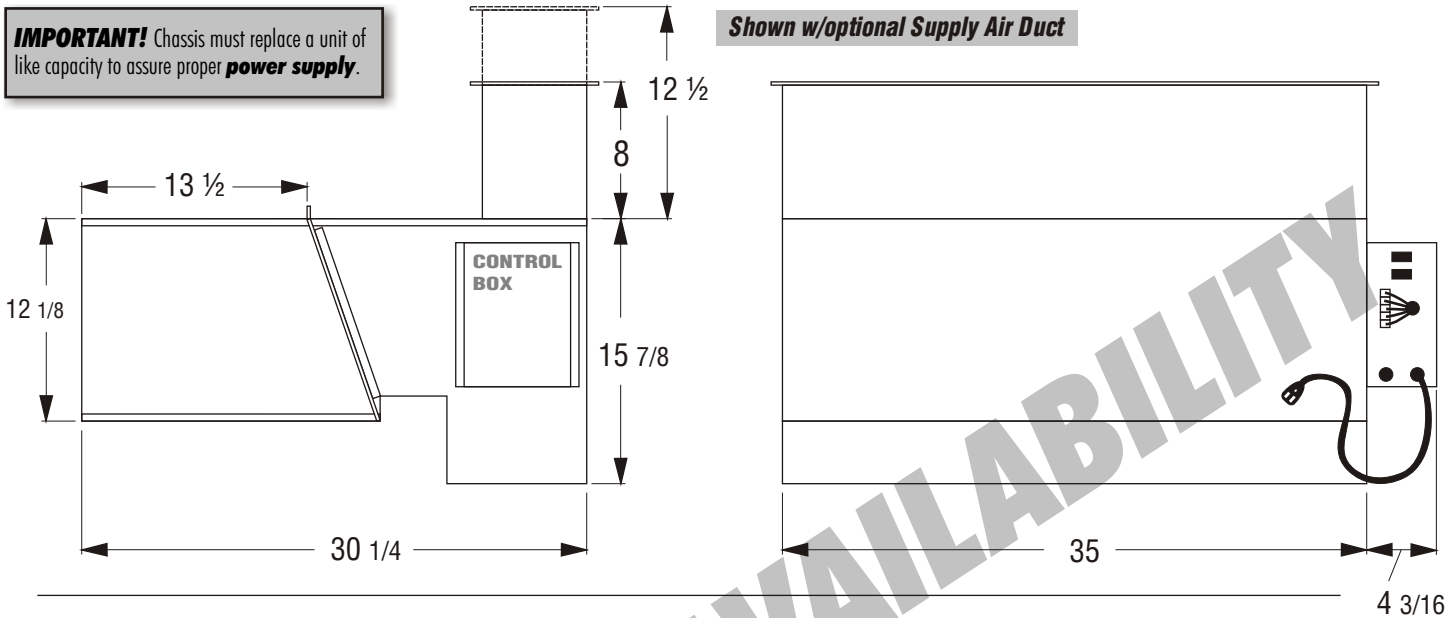

42 CHASSIS ELECTRICAL RATINGS (1)

| Model | Voltage/ HZ/Ph | Evap. Mtr. HP** | Evap. Mtr. Amps** | Cond. Mtr. HP | Cond. Mtr. Amps | Comp RLA | Comp LRA | TOTAL AMPS** | CKT AMPAC** | MAX FUSE | MIN. Volts | Line Cord |
|--------|-------------------|-----------------------|-------------------------|------------------|-----------------------|-------------|-------------|-----------------|----------------|-------------|---------------|--------------|
| 42- 09 | 115/60/1 | 1/10 | 1.2 | 1/5 | 3.2 | 7.5 | 42.0 | 11.9 | 14 | 20 | 104 | 5-15P |
| 42- 09 | 208/230/60/1 | 1/10 | 0.6 | 1/5 | 1.2 | 3.7 | 21.0 | 5.5 | 7 | 15 | 197 | 6-15P |
| 42- 09 | 265/60/1 | 1/10 | 0.6 | 1/5 | 1.2 | 3.1 | 15.0 | 4.9 | 6 | 15 | 239 | N/A |
| 42- 12 | 115/60/1 | 1/10 | 1.2 | 1/5 | 3.2 | 9.9 | 56.0 | 14.1 | 17 | 25 | 104 | 5-20P |
| 42- 12 | 208/230/60/1 | 1/10 | 0.6 | 1/5 | 1.2 | 5.0 | 24.0 | 6.8 | 9 | 15 | 197 | 6-15P |
| 42- 12 | 265/60/1 | 1/10 | 0.6 | 1/5 | 1.2 | 4.2 | 20.0 | 6.0 | 8 | 15 | 239 | N/A |
| 42- 15 | 208/230/60/1 | 1/10 | 0.6 | 1/4 | 2.0 | 6.6 | 34.0 | 9.2 | 11 | 15 | 197 | 6-15P |
| 42- 15 | 265/60/1 | 1/10 | 0.6 | 1/4 | 1.1 | 5.4 | 30.0 | 7.1 | 9 | 15 | 239 | N/A |

**w/optional Adirondack-Aire Blower Section

(1) If electric heat option is selected see Electric Heat Ratings Table: Total AMPS, Ampacity & Fuse size is the larger value.

NEMA Configurations

Non Locking Plugs/Receptacles

| Voltage | 125V | 250V | 277V |
|-----------|-----------|-----------|-----------|
| 15A Recp. | 5-15R | 6-15R | 7-15R |
| 15A Plug | 5-15P | 6-15P | 7-15P |
| 20A Recp. | 5-20R | 6-20R | 7-20R |
| 20A Plug | 5-20P | 6-20P | 7-20P |
| 30A Recp. | 5-30R | 6-30R | 7-30R |
| 30A Plug | 5-30P | 6-30P | 7-30P |

Electric Heat Ratings (optional)

| Heater No. (wcu) | Volt | Watts | BTU/h | HTR Amps | Total HTR Amps | Min CKT Amps | Max. Fuse | Line Cord |
|------------------|------|-------|--------|----------|----------------|--------------|-----------|-----------|
| 2 | 208 | 1,800 | 6,140 | 8.7 | 9.3 | 12.0 | 15 | 6-15P |
| | 230 | 2,200 | 7,500 | 9.6 | 10.2 | 13.0 | 15 | 6-15P |
| | 265 | 2,900 | 9,900 | 10.9 | 11.5 | 15.0 | 15 | N/A |
| | 277 | 3,190 | 10,900 | 11.5 | 12.1 | 15.0 | 15 | N/A |
| 3 | 208 | 2,450 | 8,350 | 11.8 | 12.4 | 16.0 | 20 | 6-20P |
| | 230 | 3,000 | 10,200 | 13.1 | 13.7 | 17.0 | 20 | 6-20P |
| | 265 | 4,000 | 13,640 | 15.1 | 15.7 | 20.0 | 20 | N/A |
| | 277 | 4,350 | 14,830 | 15.7 | 16.3 | 21.0 | 25 | N/A |
| 4 | 208 | 3,270 | 11,150 | 15.7 | 16.3 | 21.0 | 25 | 6-30P |
| | 230 | 4,000 | 13,640 | 17.4 | 18.0 | 23.0 | 30 | 6-30P |

42 PERFORMANCE TABLE (Tested in Accordance w/ARI)

| Model | COMP | Cond. Fan Type/Air Direction | Cool BTUH | SENS BTUH | EER | CFM HI/ LO* |
|--------|--------|------------------------------|-----------|-----------|-----|-------------|
| 42- 09 | Rotary | Centrifugal/Blow Thru | 9,300 | 8,300 | 9.1 | 440/330 |
| 42- 12 | Rotary | Centrifugal/Blow Thru | 11,500 | 9,300 | 8.9 | 440/330 |
| 42- 15 | Rotary | Centrifugal/Blow Thru | 15,000 | 12,000 | 8.5 | 550/400 |

*Dry Coil Airflow w/optional Adirondack-Aire Blower Section



| Model No. | Shipping Weight (lbs) |
|-----------|-----------------------|
| 09 | 145 |
| 12 | 145 |
| 15 | 145 |

12-07